



**Made From
BORON STEEL
Material**

Mounted Reversible Plough



Loriya Agro Equipment

Making one of the best Mounted Reversible Plough

Best efficiency, Better fuel saving, Smooth Running, Creating Green Revolution in India, Proud of India



Mounted Reversible Plough




WITH ADVANCE TECHNOLOGY ENGINEERING



Reliable Turnover Mechanism

All LORIYA mounted ploughs feature the modern LORVEN hydraulic turnover mechanism with double acting ram which provides precise, safe and quick turnover action. The strong turnover axle with special hardened steel can withstand hard shock loads.

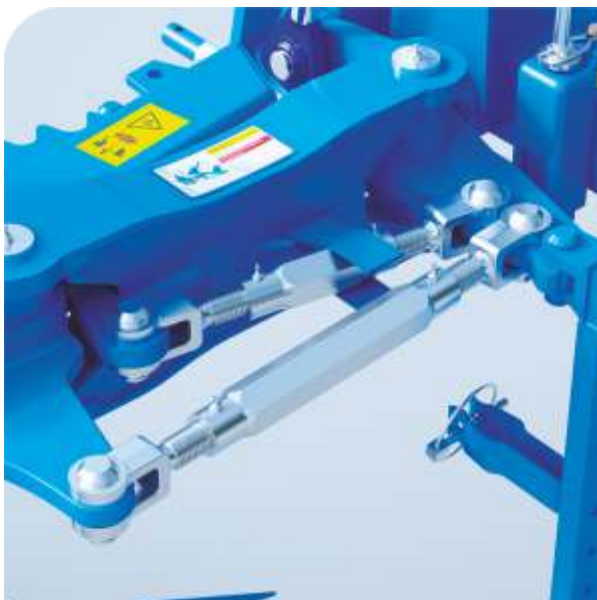

Optiquick Adjustment Setting

Optiquick allows for the easy & efficient adjustment of front furrow width & tractor pull line, independently of each other. Lateral forces are eliminated in easier way with this optiquick adjustment setting.



Over Load Security

Even where the share point is firmly caught under the stone, tree root or rock ridge, all LORIYA ploughs are protected against damage by an additional shear bolt device as standard. A new shear bolt easily and quickly replaced and the work will not suffer.



Height Adjustable Drawbar

Height of drawbar can be adjusted for all conditions allowing optimum setting of lower links. It can be easily and rapidly changed to match different linkage categories. Tractor and implements are protected because it acts as a shock absorber.



Infnite Angle Adjustment


Angle adjustment independent for L/H & R/H work. Corrosion resistance adjuster screws always ensure a smooth operation.



Mounted Reversible Plough
Single Furrow




Mounted Reversible Plough
Double Furrow

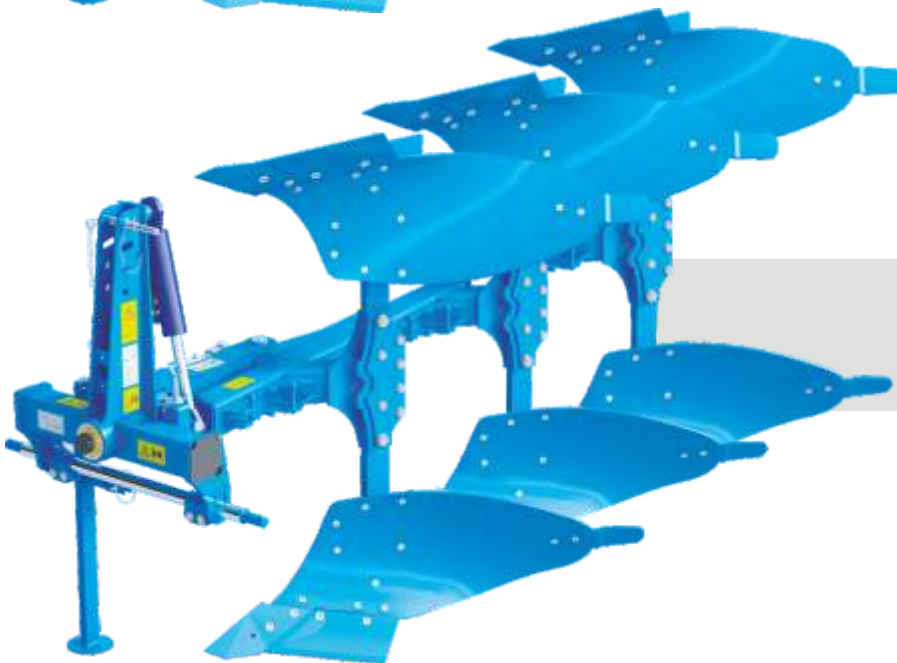

Mounted Reversible Plough
Triple Furrow

EASY TO MAINTAIN COMPONENTS

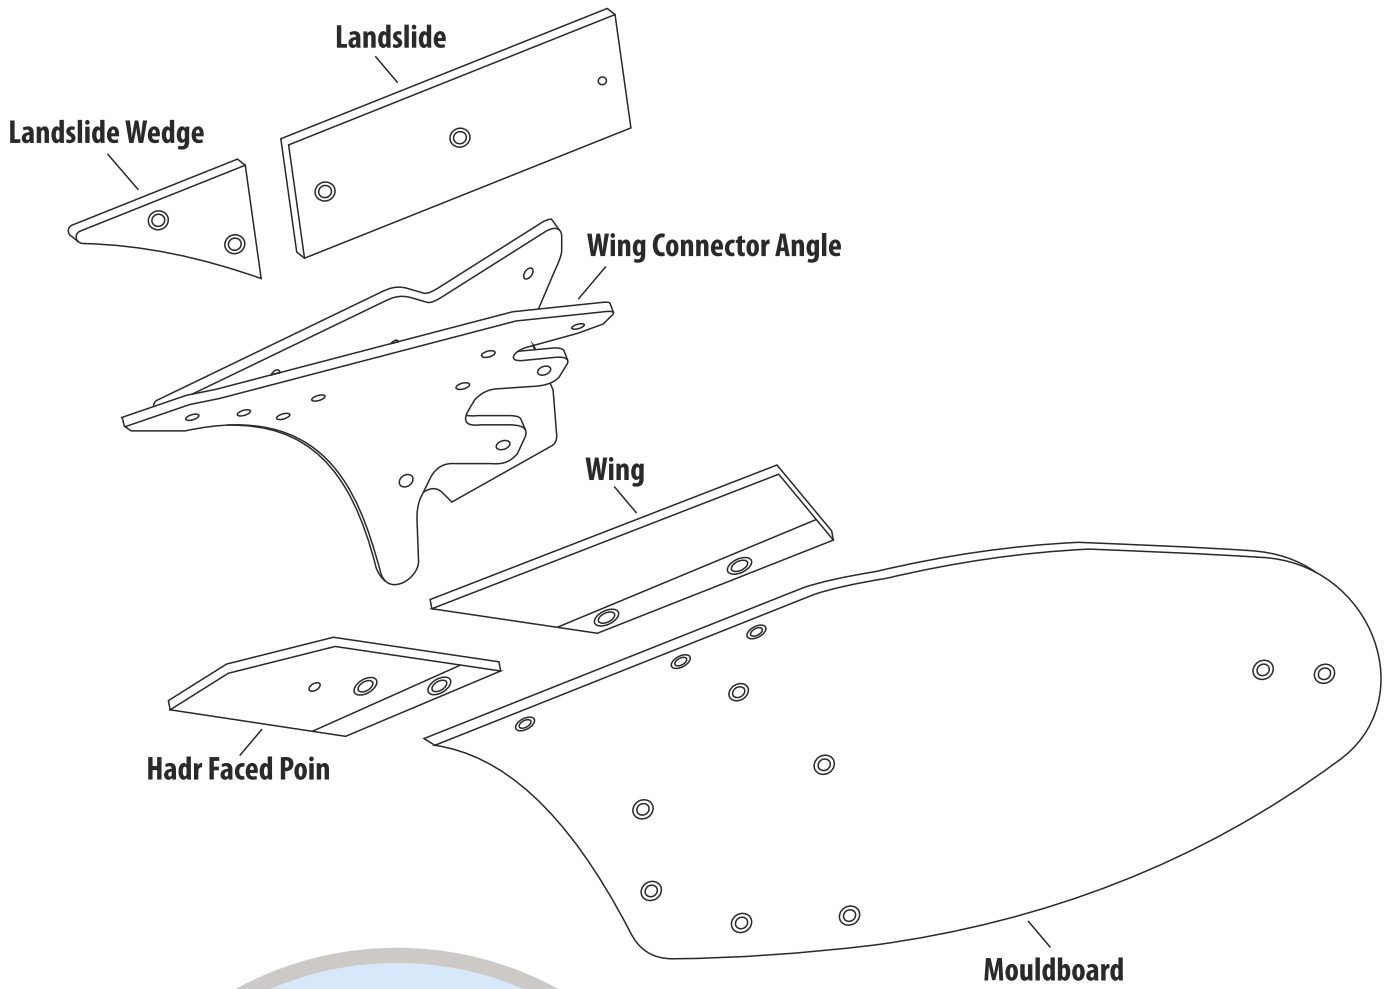



Mounted Reversible Plough

TECHNICAL DATA									
Number of Furrows	1	1	1	2	2	2	2+1	2+1	2+1
Working Width (Inch)	10	12	14	20	24	28	30	36	42
HP required	35	40	45	50	55	60	65	70	75
Weight (Kg)	280			440			580		
Working Depth (Inch)	8-14			8-14			8-14		
Underframe Clearance (mm)	660			660			660		
Interbody Clearance (mm)	840			840			840		
Leg Size (mm)	82 x 25			82 x 25			82 x 25		

All specifications, dimensions and weights are subject to continuous technical development and are therefore not binding. The weight specifications always refer to the basic equipment, subject to change.


LORIYA Agro Equipment

Rajkot-Gondal Highway, Opp. Krishna Park Hotel, Rajkot - 360007 (Gujarat)
 E-mail : loriyaagroindia@gmail.com | Website : www.loriyaagro.com
 Contact : +91 - 90331 19595, +91 - 97273 58692 | Cell : +91 - 98255 16895



**Made From
BORON STEEL
Material**